



Stylish design screwless at sight

Extremely silent mechanics

High technological materials resistant to weather conditions

The release system is ergonomic, efficient and easily accessible




CONTROL UNIT CT10324

+ CT10324



New 5-character / 16-segment display for more natural and intuitive reading

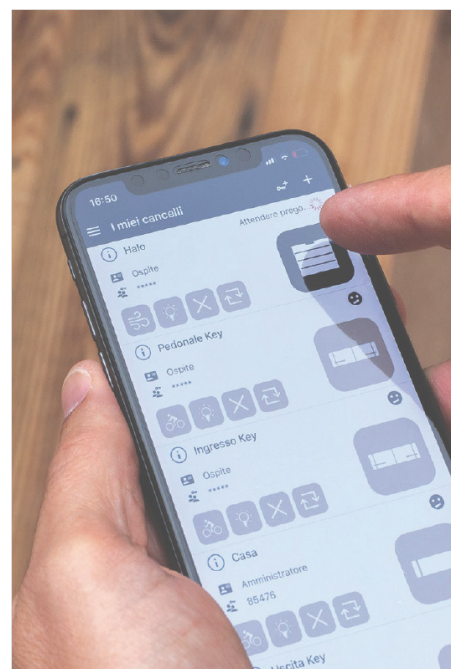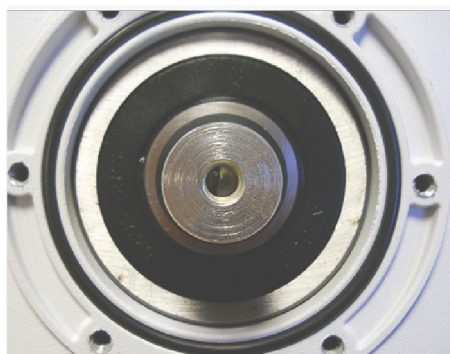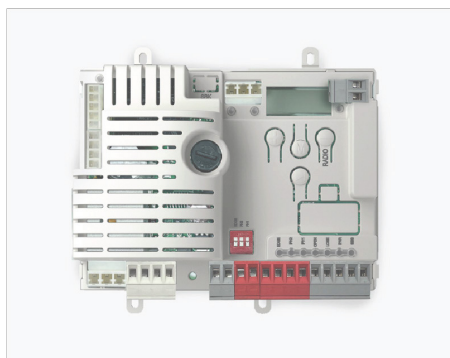+ KUBEPRO

Optional programming with KUBE PRO wireless module (from Firmware version 2.0 and new smartphone app to be released in July 2024).



MODELS

CODE	DESCRIPTION
  SUN5324M	For sliding gates up to 500 kg, 24 Vdc motor, control unit CT10324 with slowdown and magnetic limit switch. Integrated receiver. Residential use

TECHNICAL DATA

SUN5324M

MECHANICAL DATA

speed	cm/s	26*
torque	Nm	18
cycles/hour**		40


ELECTRICAL DATA

control board		CT10324
automation power supply	Vac	230
frequency	Hz	50/60
motor power supply	Vdc	24
consumption	A	1,2
absorbed power	W	250

GENERIC DATA

protection degree	IP	44
dimensions (L - D - H)	mm	
weight	kg	10,7
working temperature	°C	-20 + 55
gate maximum weight	kg	500

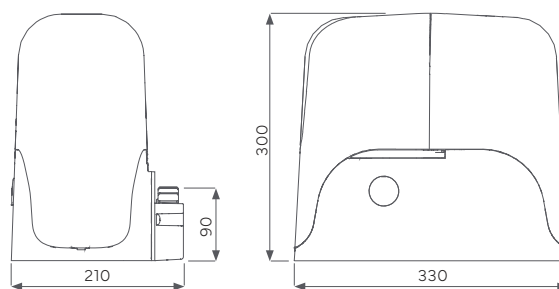DIMENSIONS



*The value varies based on the weight of the gate. For co-ownership use, we recommend using 700 kg models.

** The cycles now indicated are with a standard leaf of 2 m length and weight of 200 kg at an ambient temperature of 20°C.

ACCESSORIES




RN800 *M4 nylon rack
L=1000 mm for gates up to
800 kg €/m



CREM-8 **M4 zinc coated rack
30x8 mm L=1000 mm



CREM-12 **M4 zinc coated rack
30x12 mm L=1000 mm



TWIN Interface for
master/slave function
(SUN7224)



KCS Unlock kit with
key



SUB remotes Water and dust
resistant 433MHz
transmitters, rolling code



999ACCE018B00 Magnetic
Limit switch and bolts accessory
pack



KUBE PRO Wireless
module for
programming



KUBE Wireless controlling module
for end user



RX4K 4-channel plug-in receiver,
433MHz, for CT202 control unit



KPLAY4R Kit with 2x 4-channel
433 MHz transmitters, rolling
code



FT43 Pair of photocells
for external use
adjustable through 180



FT43B Pair of photocells for
external use adjustable through
180, battery version



FT33 Pair of photocells for
external use, flush mounting



RP25K Reflective photocells



ECLIPSE Led flashing with
courtesy light, crepuscular
sensor and built-in antenna



SEL-R Wireless keypad
transmitter, 433MHz



EGKTR1 Wireless keypad
transmitter, EGO series 433MHz



TO1M 1-channel touch
transmitter, rolling code 433Mhz



RXM23Y 2-channel universal
receiver, fix or rolling code



KBP Kit of 1.3 Ah lead battery
and battery charger



KSOLAU Solar kit,
includes 30W panel,
recharge unit in
enclosure, mounting
brackets and batteries



SPLIT24V Low Voltage box



EG50 50cm post for
accessories