

Version without encoder



Robust gears and mechanical parts

Metallic release system in composite material

Sturdy telescopic stem

Mechanical parts well protected from external debris



MODELS

CODE	DESCRIPTION
  STAR3024	For swing gates with maximum length 3 m per leaf, pair of irreversible 24 Vdc motors, without encoder (2 pcs, left and right)




Special order request.
New black version of motor available, approximately 6-8 weeks lead time.

KITS

CODE	DESCRIPTION
  KSTAR3024	Kit for double swing gates with maximum length 3 m per leaf, pair of irreversible 24 Vdc motors, without encoder (2 pcs, left and right) with control board CT20324.

LIMIT USE

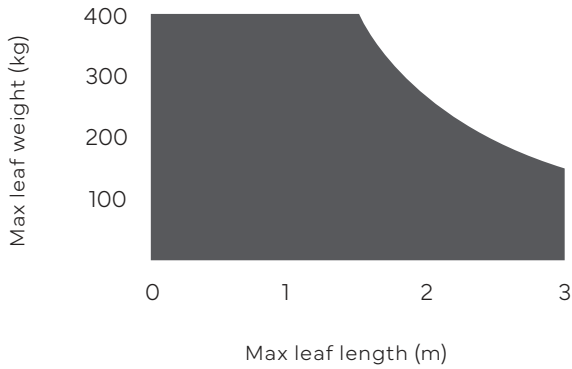

Gate shape and height and weather conditions can considerably reduce the values shown above, in the graph.

TECHNICAL DATA

STAR3024

MECHANICAL DATA

speed	cm/s	2,5
pulling force	N	1400
cycles/hour		80
opening time at 90°	sec	18-25


ELECTRICAL DATA

control board		CT20324
power	Vdc	24
consumption	A	3,5
absorbed power	W	85

GENERIC DATA

protection degree	IP	54
dimensions (L - D - H)	mm	741 - 115 - 177
weight	kg cad	9,24
working temperature	°C	-20 + 55
leaves maximum weight	Kg	400


DIMENSIONS

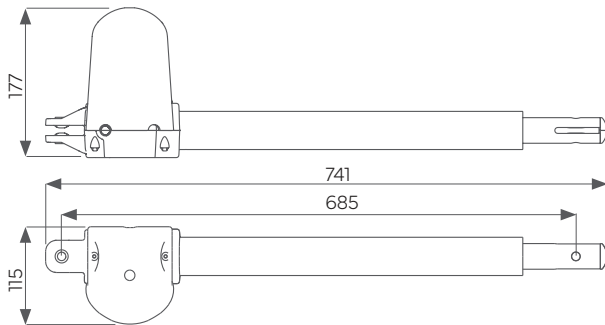

ACCESSORIES



ELS-C12V
horizontal electric lock, upto 2000KG



KBP Kit of 1.3 Ah lead battery and battery charger



KITFIXBATT Fixing brackets for batteries 24 V



KSOLAU Solar kit, includes 30W panel, recharge unit in enclosure, mounting brackets and batteries



SPLIT24V Low Voltage box



CT20324 Control unit 2 motors, 24 Vdc in box



KUBE PRO Wireless module for programming



KUBE Wireless controlling module for end user



KPLAY4R Kit with 2x 4-channel 433 MHz transmitters, rolling code



SUB remotes Water and dust resistant 433MHz transmitters, rolling code



SEL-R Wireless keypad transmitter, 433MHz



EGKTR1 Wireless keypad transmitter, EGO series 433MHz



TO1M 1-channel touch transmitter, rolling code 433Mhz



RXM23Y 2-channel universal receiver, fix or rolling code



ANTS-433 Blade antenna to 433 MHz with steel bracket and RG-58 cable, L. 5000 mm



FT43 Pair of photocells for external use adjustable through 180



FT43B Pair of photocells for external use adjustable through 180, battery version



FT33 Pair of photocells for external use, flush mounting



RP25K Reflective photocells



EG50 Ego post for photocell housing, height 500 mm